

38M

JXLR 38-4.16

alliance



GENERAL

PIPE SIZE (ID)	125 mm (5")
BOOM CONTROL VALVE	Proportional (by HAWE)
RADIO REMOTE	Dual Wireless Transmitter System
VIBRATOR	Standard
WATER PUMP	Hydraulic Power 20 bar (290 psi)
WATER TANK	800 L (211 G)
WEAR PARTS	Carbide
POPULAR UPGRADES†	• LED Boom Light Kit • LED Outrigger Lights • Heated Water Tank • Heated Hydraulic Tank • Air-Cuff • Twin Wall Pipe • 20 Cell Pump Kit • 18 Cell Pump Kit

BOOM

NUMBER OF BOOMS	4 Sections
FOLDING TYPE	R Fold
VERTICAL HEIGHT	37.1m (121'9")
HORIZONTAL REACH	33.1m (108'7")
UNFOLDING HEIGHT	8.6 m (28'3")
1ST SECTION	8.7 m (28'7")
2ND SECTION	7.89 m (25'11")
3RD SECTION	8.08 m (26'6")
4TH SECTION	8.43 m (27'8")
OUTRIGGER	X-Style
FRONT SPREAD	6.3 m (20'8")
REAR SPREAD	7 m (23')
OUTRIGGER MAX LOAD:	16,828 kg 37,100 lb

PUMP

OUTPUT:	Rod Side	164 m³/h (215 yd³/h)
	Piston Side	102 m³/h (133 yd³/h)
PRESSURE:	Rod Side	72 Bar (1044 psi)
	Piston Side	115‡ bar (1668 psi)
CONCRETE CYLINDER DIAMETER		230 mm (9")
CONCRETE CYLINDER TYPE		Hard Chromed
STROKE LENGTH		2100 mm (83")
S-TUBE SIZE		9" x 7"
MAIN OIL PUMP		Rexroth hydromatic A11VLO260
HYDRAULIC SYSTEM PRESSURE		350 bar (5076 psi)
LUBE SYSTEM (HOPPER)		Automatic
SWITCHING SYSTEM		Hydraulic
HOPPER CAPACITY		Easy Clean 600 L (158 G)
NUMBER OF STROKES/MIN		31
OUTPUT CONTROL RANGE		10(13)~164m³/h (215yd³/h)

‡ More options available, ask your sales rep for details.

† Not to be used through boom pipe

Alliance Concrete Pumps Inc. reserves the right to make changes to all specifications


allianceconcretepumps.com

 CANADIAN HEAD OFFICE
1.888.870.0908


 EAST COAST BRANCH
1.888.584.7231

 TEXAS BRANCH
1.817.442.6420

CAB OVER

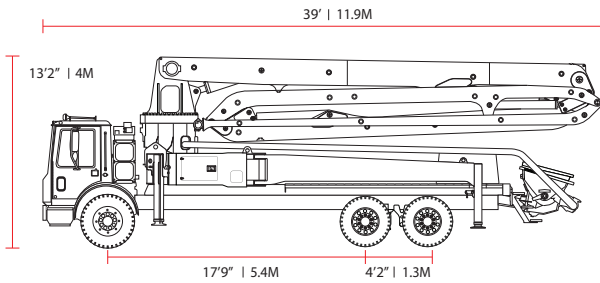

CONVENTIONAL

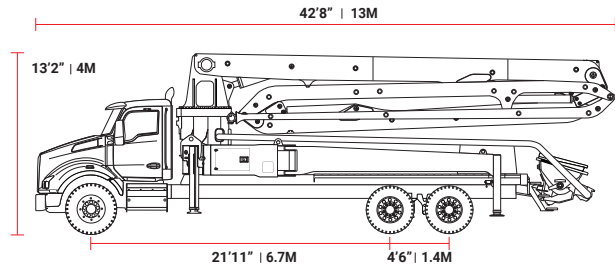


CAB OVER

FRONT AXLE	REAR AXLE	OVERALL LENGTH	TOTAL WEIGHT
19,900 LB 9,026 KG	37,350 LB 16,942 KG	39' 11.9 M	57,250 LB 25,968 KG

CONVENTIONAL

FRONT AXLE	REAR AXLE	OVERALL LENGTH	TOTAL WEIGHT
18,150 LB 8,232 KG	39,450 LB 17,894 KG	42'8" 13 M	57,600 LB 26,123 KG

OUTRIGGER EXTENSION

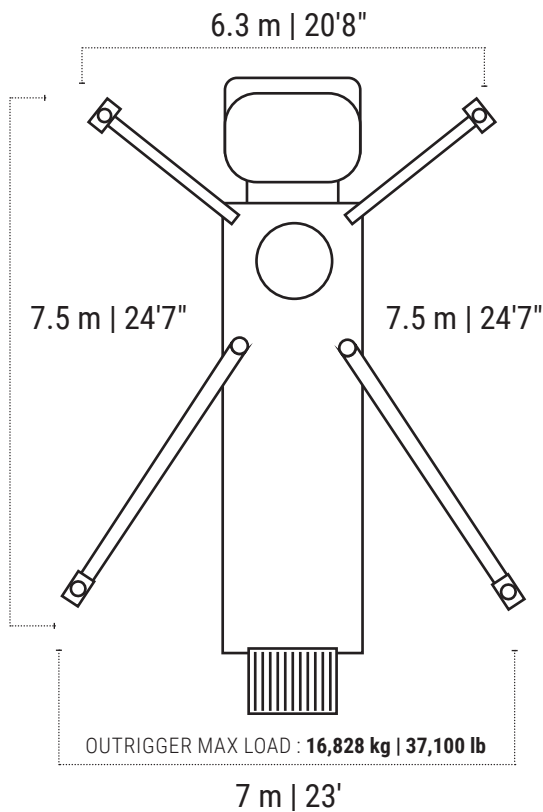

BOOM PUMP REACH

