

61M

JXRZ 61-5.18

alliance



GENERAL

PIPE SIZE (ID)	125 mm (5")
BOOM CONTROL VALVE	Proportional (by HAWE)
RADIO REMOTE	Dual Wireless Transmitter System
VIBRATOR	Standard
WATER PUMP	Hydraulic Power 20 bar (290 psi)
WATER TANK	800 L (211 G)
WEAR PARTS	Carbide
POPULAR UPGRADES†	• LED Boom Light Kit • LED Outrigger Lights • Heated Water Tank • Heated Hydraulic Tank • Air-Cuff • Twin Wall Pipe • 20 cell Pump Kit

BOOM

NUMBER OF BOOMS	5 Sections
FOLDING TYPE	RZ Fold
VERTICAL HEIGHT	60.2 m (197'6")
HORIZONTAL REACH	55.4 m (181'9")
UNFOLDING HEIGHT	14.8 m (48'9")
1ST SECTION	11.96 m (39'3")
2ND SECTION	9.32 m (30'6")
3RD SECTION	9.89 m (32'5")
4TH SECTION	12.32 m (40'5")
5TH SECTION	12.72 m (41'8")
OUTRIGGER	X-Style
FRONT SPREAD	11.8 m (38'8")
REAR SPREAD	12.6 m (41'4")
OUTRIGGER MAX LOAD:	40,788 kg 89,923 lbs

PUMP

OUTPUT:	Rod Side	181 m³/h (235 yd³/h)
	Piston Side	122 m³/h (159 yd³/h)
PRESSURE:	Rod Side	85 bar (1233 psi)
	Piston Side	130‡ bar (1886 psi)
CONCRETE CYLINDER DIAMETER		230 mm (9")
CONCRETE CYLINDER TYPE		Hard Chromed
STROKE LENGTH		2100 mm (83")
S-TUBE SIZE		9" x 7"
MAIN OIL PUMP		Twin Rexroth Hydromatic A20VLO190
HYDRAULIC SYSTEM PRESSURE		350 bar (5076 psi)
LUBE SYSTEM (HOPPER)		Automatic
SWITCHING SYSTEM		Hydraulic
HOPPER CAPACITY		Easy Clean 600 L (158 G)
NUMBER OF STROKES/MIN		34
OUTPUT CONTROL RANGE		20(26)~181m³/(235yd³/h)

‡ More options available, ask your sales rep for details.

† Not to be used through boom pipe


Alliance Concrete Pumps Inc. reserves the right to make changes to all specifications

allianceconcretepumps.com

 CANADIAN HEAD OFFICE
1.888.870.0908

 EAST COAST BRANCH
1.888.584.7231


 TEXAS BRANCH
1.817.442.6420

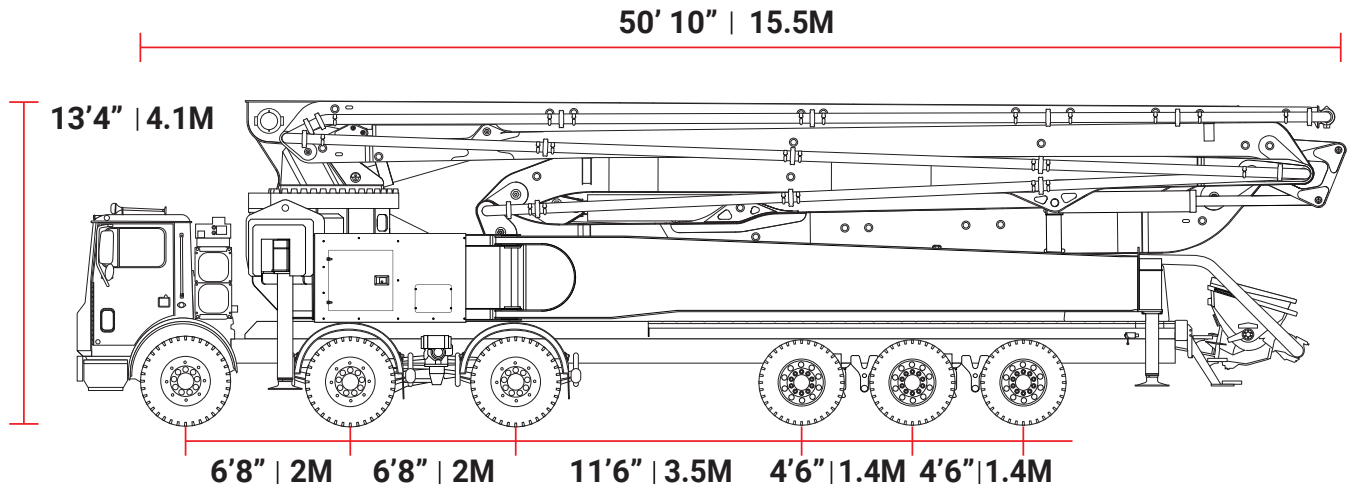

CAB OVER

FRONT AXLE	REAR AXLE	OVERALL LENGTH	TOTAL WEIGHT
58,500 LBS 26,535 KG	57,100 LBS 25,900 KG	50' 5" 15.5 M	115,600 LBS 52,435 KG

OUTRIGGER EXTENSION

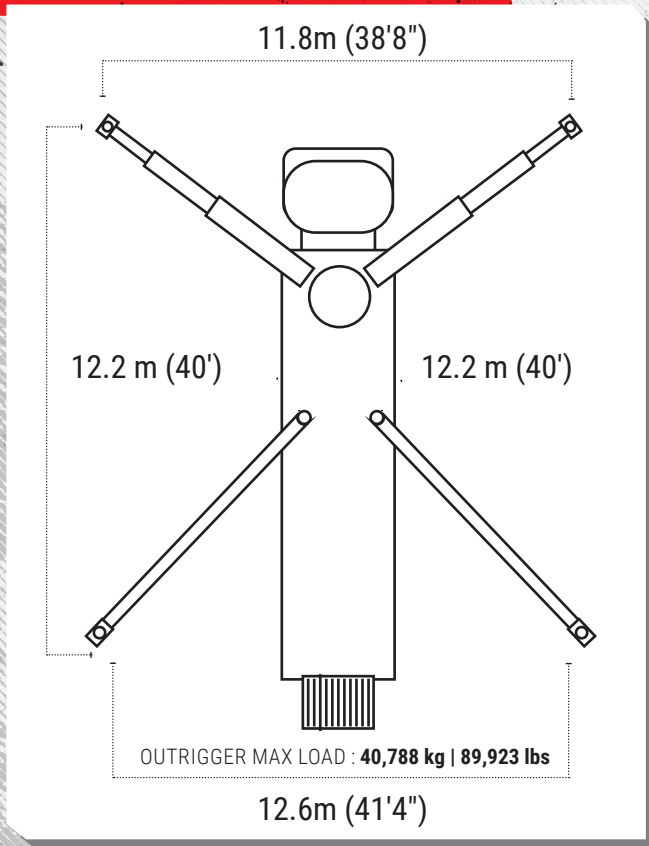

BOOM PUMP REACH

