

65M

JXRZ 65-5.18

alliance



GENERAL

PIPE SIZE (ID)	125 mm (5")
BOOM CONTROL VALVE	Proportional (by HAWE)
RADIO REMOTE	Dual Wireless Transmitter System
VIBRATOR	Standard
WATER PUMP	Hydraulic Power 20 bar (290 psi)
WATER TANK	800 L (211 G)
WEAR PARTS	Carbide
POPULAR UPGRADES†	• LED Boom Light Kit • LED Outrigger Lights • Heated Water Tank • Heated Hydraulic Tank • Air-Cuff • Twin Wall Pipe • 20 cell Pump Kit • CCI Lined Backend

BOOM

NUMBER OF BOOMS	5 Sections
FOLDING TYPE	RZ Fold
VERTICAL HEIGHT	64.5 m (211'7")
HORIZONTAL REACH	59.6 m (195'6")
UNFOLDING HEIGHT	17 m (55'9")
1ST SECTION	13.25 m (43'6")
2ND SECTION	10.75 m (35'3")
3RD SECTION	10.5 m (34'5")
4TH SECTION	12.9 m (42'4")
5TH SECTION	13 m (42'8")
OUTRIGGER	X-Style
FRONT SPREAD	12.65 m (41'6")
REAR SPREAD	12.3 m (40'4")
OUTRIGGER MAX LOAD:	44,867 kg 98,916 lb

PUMP

OUTPUT:	Rod Side	181 m³/h (235 yd³/h)
	Piston Side	122 m³/h (159 yd³/h)
PRESSURE:	Rod Side	85 bar (1233 psi)
	Piston Side	130‡ bar (1886 psi)
CONCRETE CYLINDER DIAMETER		230 mm (9")
CONCRETE CYLINDER TYPE		Hard Chromed
STROKE LENGTH		2100 mm (83")
S-TUBE SIZE		9" x 7"
MAIN OIL PUMP		Twin Rexroth Hydromatic A20VLO190
HYDRAULIC SYSTEM PRESSURE		350 bar (5076 psi)
LUBE SYSTEM (HOPPER)		Automatic
SWITCHING SYSTEM		Hydraulic
HOPPER CAPACITY		Easy Clean 600 L (158 G)
NUMBER OF STROKES/MIN		34
OUTPUT CONTROL RANGE		20(26)~181m³ (235yd³/h)

† More options available, ask your sales rep for details.

‡ Not to be used through boom pipe

Alliance Concrete Pumps Inc. reserves the right to make changes to all specifications

allianceconcretepumps.com




CANADIAN HEAD OFFICE
1.888.870.0908



EAST COAST BRANCH
1.888.584.7231




TEXAS BRANCH
1.817.442.6420

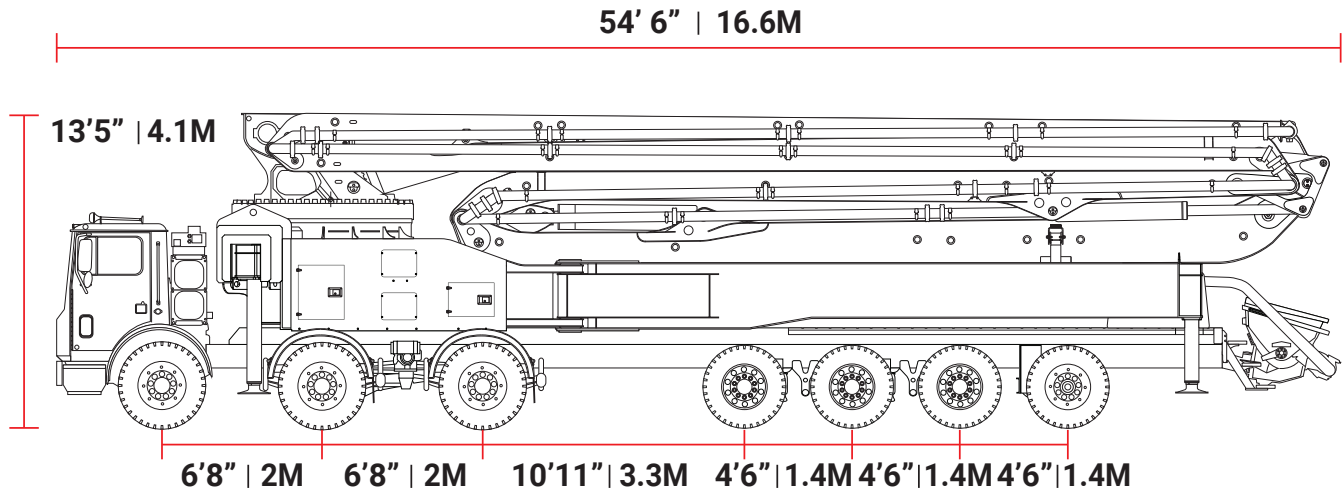

CAB OVER

FRONT AXLE	REAR AXLE	OVERALL LENGTH	TOTAL WEIGHT
57,000 LBS 25,855 KG	71,998 LBS 32,658 KG	54' 6" 16.6 M	128,998 LBS 58,513 KG

OUTRIGGER EXTENSION

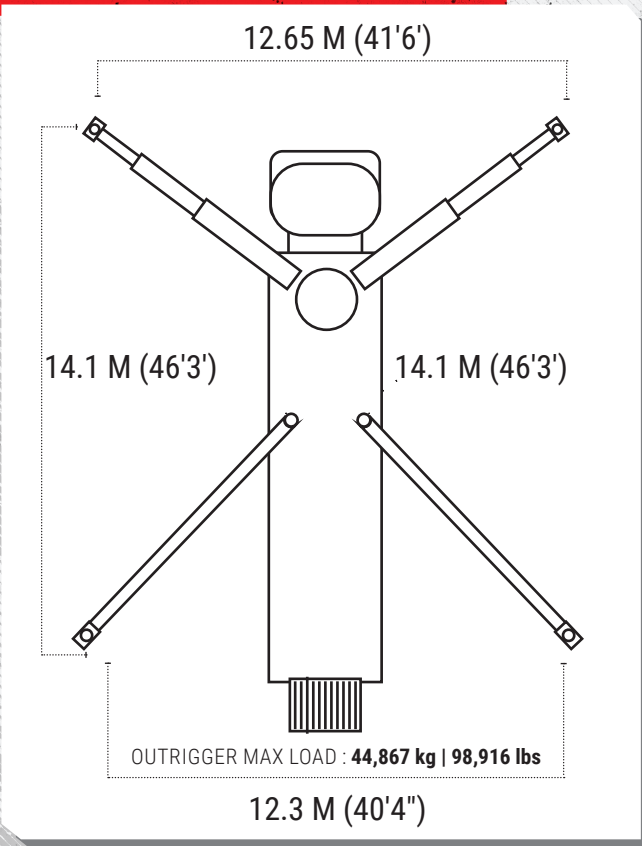

BOOM PUMP REACH

