

28M

JXZ 28-4.10

alliance



GENERAL

PIPE SIZE (ID)	125 mm (5")
BOOM CONTROL VALVE	Proportional (by HAWE)
RADIO REMOTE	Dual Wireless Transmitter System
VIBRATOR	Standard
WATER PUMP	Hydraulic Power 20 bar (290 psi)
WATER TANK	500 L (132 Gal)
WEAR PARTS	Carbide
POPULAR UPGRADES†	• LED Boom Light Kit • LED Outrigger Lights • Heated Water Tank • Heated Hydraulic Tank • Air-Cuff • Twin Wall Pipe • 12 Cell Pump Kit • 16 Cell Pump Kit

BOOM

NUMBER OF BOOMS	4 Sections
FOLDING TYPE	Z Fold
VERTICAL HEIGHT	27.6m (90'7")
HORIZONTAL REACH	23.8m (78'1")
UNFOLDING HEIGHT	6.4m (21')
1ST SECTION	7.2m (23'7")
2ND SECTION	5.2m (17'1")
3RD SECTION	5.4m (17'9")
4TH SECTION	6.0m (19'8")
FRONT OUTRIGGER	X-Style
REAR OUTRIGGER	Vertical
FRONT SPREAD	5.6m (18'4")
REAR SPREAD	2.5m (8'2")
OUTRIGGER MAX LOAD:	31,500 LB 14,288 KG

PUMP

OUTPUT:	Rod Side	96m³/h (126yd³/h)
	Piston Side	63m³/h (82yd³/h)
PRESSURE:	Rod Side	76bar (1102psi)
	Piston Side	112bar (1625psi)
CONCRETE CYLINDER DIAMETER		200mm (8")
CONCRETE CYLINDER TYPE		Hard chromed
STROKE LENGTH		1600mm (63")
S-TUBE SIZE		8" x 7"
MAIN OIL PUMP		Kawasaki 180cc
HYDRAULIC SYSTEM PRESSURE		350 bar (5076 psi)
LUBE SYSTEM (HOPPER)		Automatic
SWITCHING SYSTEM		Hydraulic
HOPPER CAPACITY		Easy Clean 600L (158G)
NUMBER OF STROKES/MIN		31
OUTPUT CONTROL RANGE		5(7)~96m³/h (126yd³/h)

† More options available, ask your sales rep for details.

† Not to be used through boom pipe

Alliance Concrete Pumps Inc. reserves the right to make changes to all specifications


allianceconcretepumps.com

 CANADIAN HEAD OFFICE
1.888.870.0908

 EAST COAST BRANCH
1.888.584.7231

 TEXAS BRANCH
1.817.442.6420


CONVENTIONAL

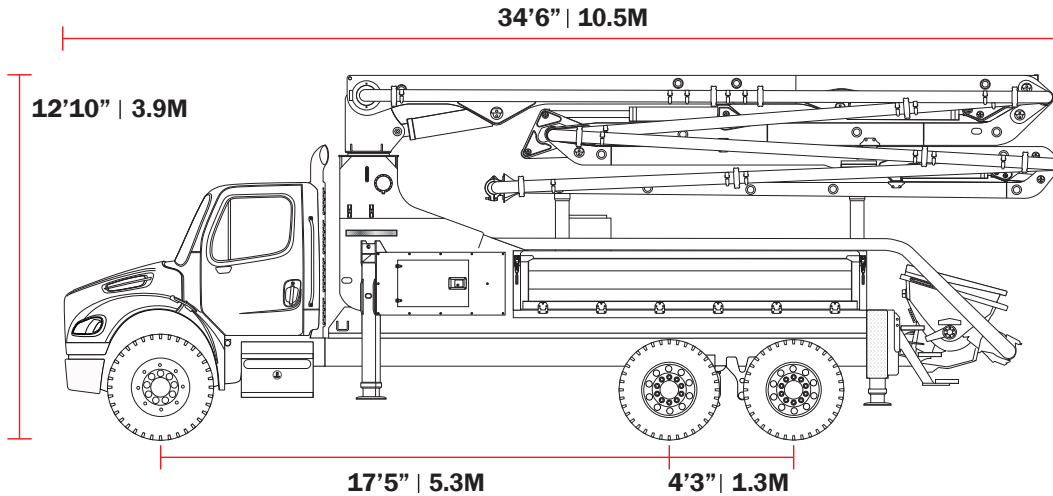

CONVENTIONAL

FRONT AXLE	REAR AXLE	OVERALL LENGTH	TOTAL WEIGHT
12,600 LB 5,715 KG	28,500 LB 12,927 KG	34'6 10.5 M	41,100 LB 18,642.6 KG

OUTRIGGER EXTENSION

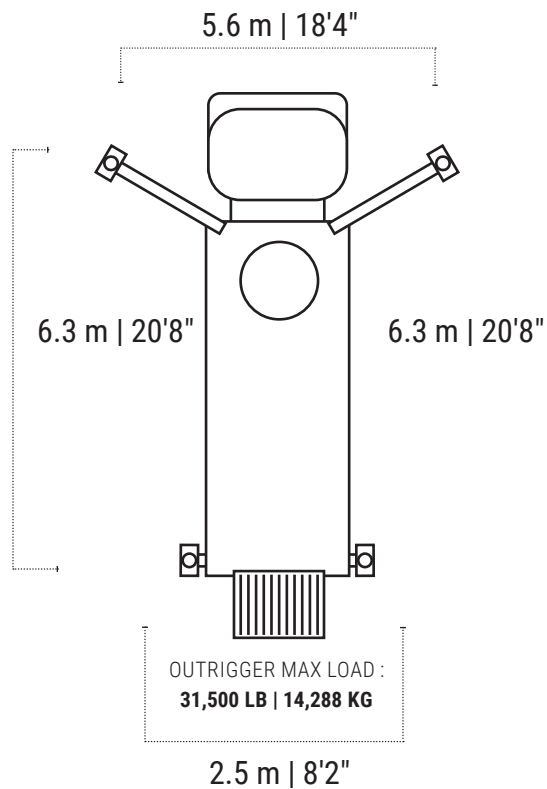

BOOM PUMP REACH

