38M

JXLZ 38-4.10

75% ROAD BAN LEGAL

alliance



GENERAL

PIPE SIZE (ID)	**125 mm (5")**
BOOM CONTROL VALVE	**Proportional (by HAWE)**
RADIO REMOTE	**Dual Wireless Transmitter System**
VIBRATOR	**Standard**
WATER PUMP	**Hydraulic Power 20 bar (290 psi)**
WATER TANK	**800 L (211 G)**
WEAR PARTS	**Carbide**
POPULAR UPGRADES‡	**• LED Boom Light Kit • LED Outrigger Lights • Heated Water Tank • Heated Hydraulic Tank • Air-Cuff • Twin Wall Pipe**

BOOM

NUMBER OF BOOMS	**4 Sections**
FOLDING TYPE	**Z Fold**
VERTICAL HEIGHT	**37.1m (121'9")**
HORIZONTAL REACH	**33.1m (108'7")**
UNFOLDING HEIGHT	**8.9m (29'2")**
1ST SECTION	**7.85m (25'9")**
2ND SECTION	**7.94m (26'1")**
3RD SECTION	**8.33m (27'4")**
4TH SECTION	**12.0m (39'4")**
OUTRIGGER	**X-Style**
FRONT SPREAD	**6.3m (20'8")**
REAR SPREAD	**7.0m (23')**
OUTRIGGER MAX LOAD:	**16,828 kg | 37,100 lb**

PUMP

OUTPUT:	**Rod Side**	**96 m³/h (126yd³/h)**
	Piston Side	**63 m³/h (82 yd³/h)**
PRESSURE:	**Rod Side**	**76 bar (1102 psi)**
	Piston Side	**112 bar (1625 psi)**
CONCRETE CYLINDER DIAMETER		**200 mm (8")**
CONCRETE CYLINDER TYPE		**Hard Chromed**
STROKE LENGTH		**1600 mm (63")**
S-TUBE SIZE		**8" X 7"**
MAIN OIL PUMP		**Kawasaki 180cc**
HYDRAULIC SYSTEM PRESSURE		**350 bar (5076 psi)**
LUBE SYSTEM (HOPPER)		**Automatic**
SWITCHING SYSTEM		**Hydraulic**
HOPPER CAPACITY		**Easy Clean 600 L (158 G)**
NUMBER OF STROKES/MIN		**31**
OUTPUT CONTROL RANGE		**5(7)~96m³/h (126yd³/h)**

‡More options available, ask your sales rep for details.

‡Not to be used through boom pipe

Alliance Concrete Pumps Inc. reserves the right to make changes to all specifications

allianceconcretepumps.com


CANADIAN HEAD OFFICE 1.888.870.0908

EAST COAST BRANCH 1.888.584.7231

TEXAS BRANCH 1.817.442.6420

WEIGHTS/DIMENSIONS


CAB OVER

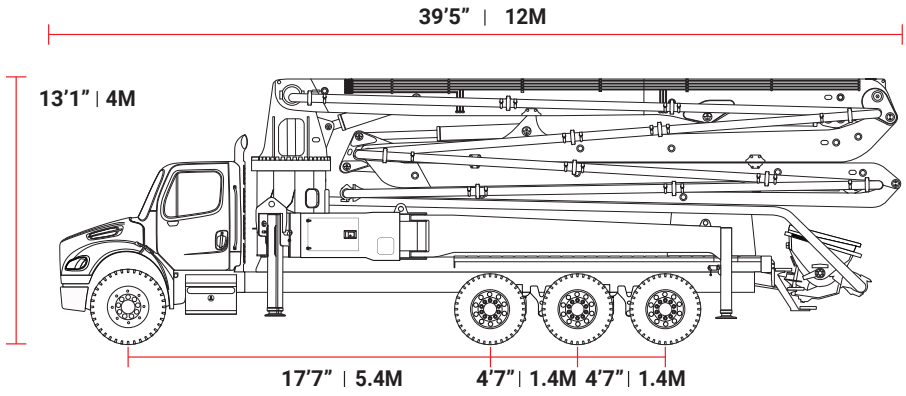

Conventional

FRONT AXLE	REAR AXLE	OVERALL LENGTH	TOTAL WEIGHT
30,181 LB | 13,690 KG	30,379 LB | 13,780 KG	39'4" | 12 M	55,027 LB | 24,960 KG

OUTRIGGER EXTENSION

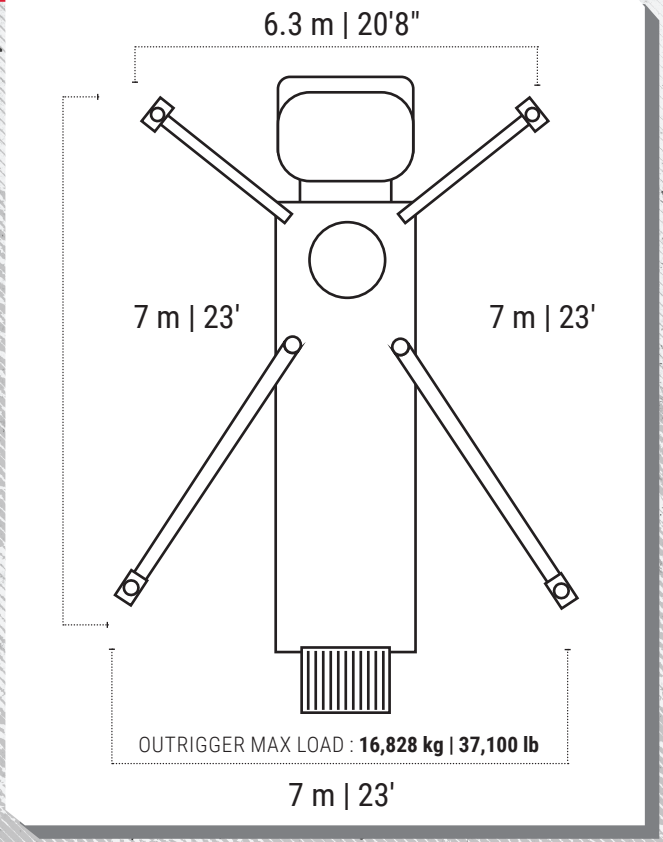

BOOM PUMP REACH

